



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency		50	Hz
Speed		890	RPM
Power consumption	P _e	770	W
Nominal current	I	3/1.8	A
Maximum current	I	3.1/1.8	A
Capacitor		-	μF
Ambient temperature	T _{amb} min/max	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		19.3	kg
Packing dimensions		855x855x353	mm



Please note: Picture may deviate from original product

Fan details


Impeller blades	5
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes
Intelligent Fan Drive	Yes

Characteristics

0 Pa	15400 m³/h
50 Pa	12900 m³/h

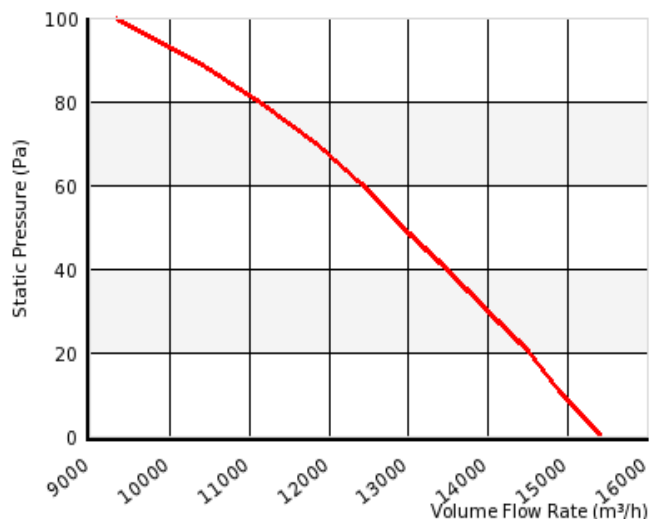


Approval(s)




Wiring diagram

AB01 - CCW

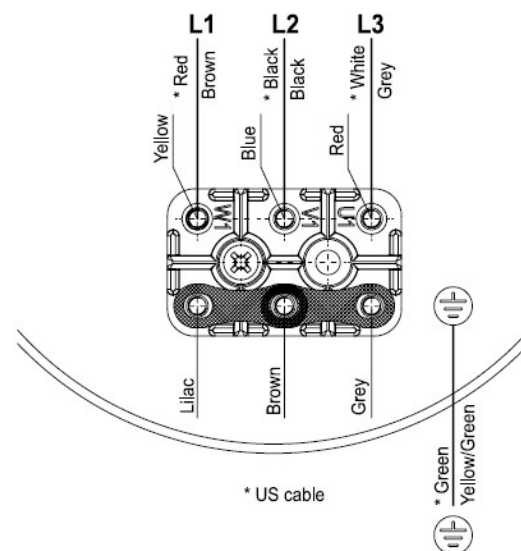

Dimensions

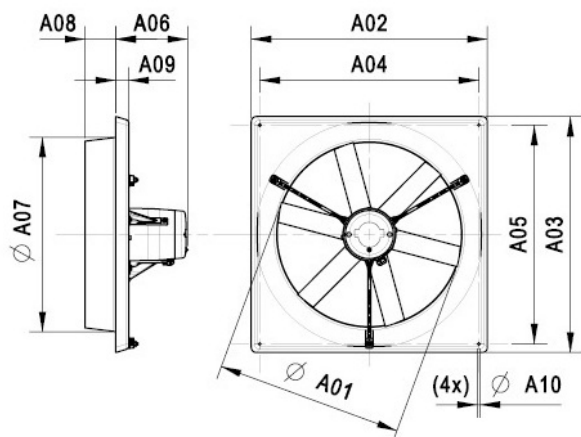

A01	712 mm
A02	850 mm
A03	850 mm
A04	790 mm
A05	790 mm
A06	247 mm
A07	740 mm
A08	105 mm
A09	40 mm
A10	10 mm