



Technical data

Voltage	U	230/400	V
Phase		3	~
Frequency		50	Hz
Speed		860	RPM
Power consumption	P _e	730	W
Nominal current	I	2.6/1.5	A
Maximum current	I	2.7/1.6	A
Capacitor		-	μF
Ambient temperature	T _{amb} min/max	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Weight		24.0	kg



Please note: Picture may deviate from original product

Fan details


Impeller blades	3
Impeller type	8
Impeller system	G
Impeller material	PG

Control options

Triac controller	No
Transformer	Yes
Frequency drive	Yes
Intelligent Fan Drive	Yes

Characteristics

0 Pa	21300 m ³ /h
50 Pa	16500 m ³ /h

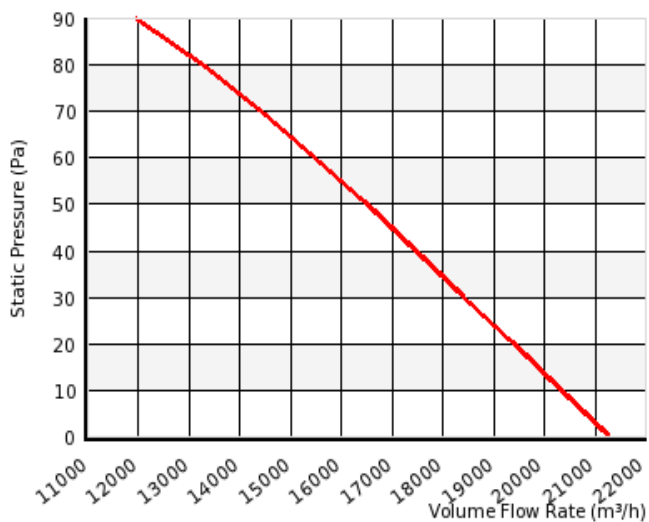


Approval(s)




Wiring diagram

AB01 - CCW

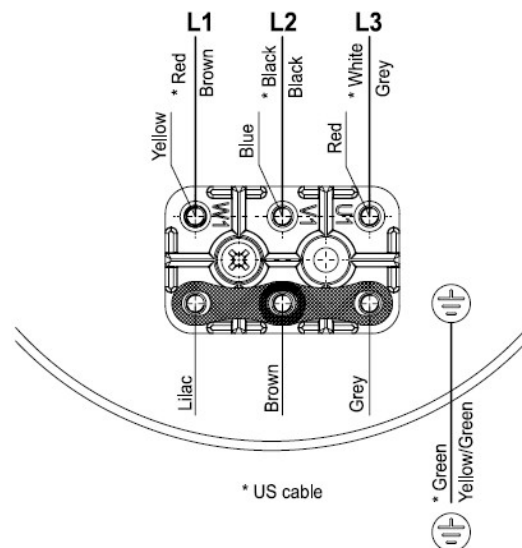

Dimensions

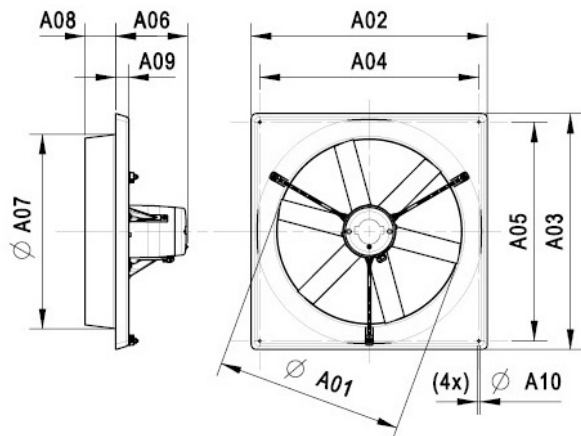

A01	915 mm
A02	1005 mm
A03	1005 mm
A04	947 mm
A05	947 mm
A06	247 mm
A07	940 mm
A08	93 mm
A09	40 mm
A10	10 mm