

DATASHEET: HWDK-C ECO LED 2

SPECIFICATIONS

| | |
|-----------------------------|-----------------------------------|
| Operating voltage: | 220 - 240V / 50 - 60Hz |
| Dimmer type: | Dali - converter |
| Dim range: | 1 - 100% |
| Connection: | 5 wire cable |
| Light source: | LED |
| Power consumption: | 19.2 W |
| Light output: | 2180lumen |
| Efficiency: | 114lm/W |
| Light colour: | 3000 K |
| Expected average lifetime*: | 40,000h |
| Operating temp: | -10°C (14°F) < Ta < +40°C (104°F) |
| Nett weight: | 2.5 kg / 5.5lbs |
| Warranty: | 2 Years |


MATERIALS

| | |
|--------|------------|
| Cover: | Frosted PC |
| Base: | ABS |

APPLICATION

Main lighting

LIGHT SPREAD

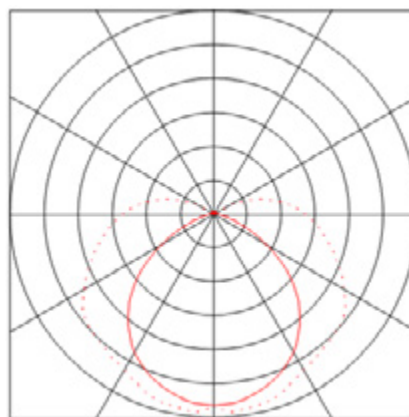

PRODUCT DETAILS

| | |
|----------|------------------|
| Art. Nr. | HWDK-C ECO LED 2 |
|----------|------------------|

DIMENSIONS

| | |
|---------|-------------------|
| Length: | 1275mm / 50.2inch |
| Height: | 110mm / 4.3 inch |
| Width | 105mm / 4.1inch |



ACCESSORIES

Dali - converter 1 - 10V

| | | | | |
|---------------------|---------|----------|---------|---------|
| Wire section in mm2 | 2 x 0.5 | 2 x 0.75 | 2 x 1.0 | 2 x 1.5 |
| Wire length in m/ft | 100/328 | 150/492 | 200/656 | 300/984 |

Specifications are subject to change without prior notice

* Lifetime definition & measurement available upon request

MARKINGS



** Protection test against penetration of water IPX7

(protected against the effect of immersion between 15cm and 1m)