



DATASHEET: OTUS

SPECIFICATIONS

Operating voltage:	230V/50-60Hz
Dimmer type:	EPU-1500 (max 100 OTUS/unit)
Dim range:	1 - 100%
Connection:	E27
Light source:	LED
Power:	13.5W = 75W incandescent bulb
Light output:	1000lumen
Efficiency:	75lm/W
Light colour:	2550K
Expected average lifetime*:	45,000hrs
Light frequency:	100Hz
Operating temp.:	-10°C (14°F) < Ta < +40°C (104°F)
Nett/Gross weight:	295gr/412gr
Energylabel:	A
Warranty:	2 Years

MATERIALS

Cover:	Impact resistant PMMA
Base:	Aluminium

PRODUCT DETAILS

Art.nr.:	OTUS-13.5-D-E27-WW
OTUS adapter for IUL-27 art.nr.:	OAI-27
IUL housing art.nr.:	IUL-27

DIMENSIONS



APPLICATION

General lighting for poultry houses





ACCESSORIES


IUL housing, Art.nr: IUL-27



To obtain IP67:
OTUS adapter for IUL-27 art.nr.: OAI-27



LIGHTSPREAD

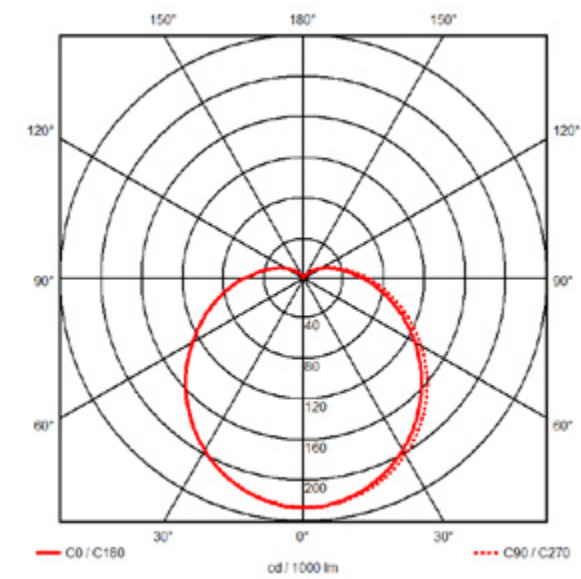

MARKINGS



Specifications are subject to change without prior notice
* Lifetime definition & measurement available upon request

HATO BV
Handelsstraat 31
NL-6135 KK SITTARD

T +31 (0)46 458 50 50
F +31 (0)46 458 50 90

www.hato.lighting
info@hato.lighting

follow us!
in G+ t y

hato®
AGRICULTURAL LIGHTING